


Construction of Cable: 600/1000V LSHF Insulated Flexible Cable

Drawing:

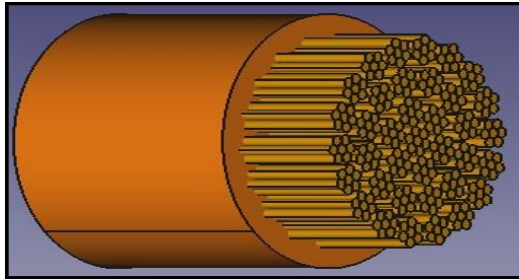

Application:

Single core low smoke halogen free (LSHF) flexible cable is suitable for installation in switch cabinets, appliances and devices for communication technologies, household appliances, construction of power generation and transformers, machine construction, railway technologies and particularly suitable for internal wiring of railway vehicles.

NO.	DESCRIPTION	LSHF Insulated Non-Sheathed
1	Conductor	Plain annealed copper wire according to IEC60228 Class 5
2	Identification of core: Assorted colours	Low smoke halogen free (LSHF) compound

TECHNICAL DATA

1	Voltage	600/1000V
2	Maximum Conductor Temperature	90°C
3	Reference	BS6231
4	Testing Voltage	3500V
5	Minimum Bending Radius	6 X Bending Radius