


**Construction of Cable: 300/500V Non-Armoured Instrumentation Cable
(Individually Screened & Overall Screened - PAIR)**

Drawing:

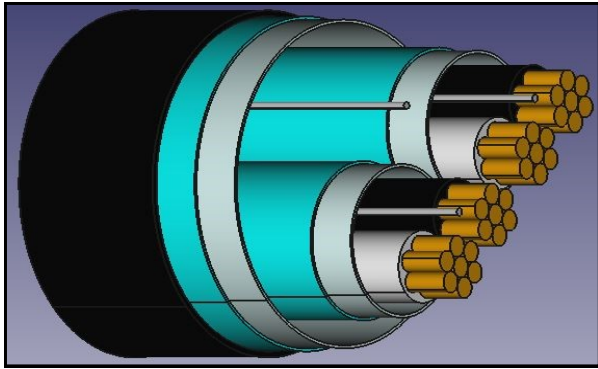

Application:

Instrumentation non-armoured cables are generally used in the petroleum and petrochemical industries. These cables are generally for indoor control applications and they are designed for use in intrinsically safe system. The cables are individually and overall shielded for greater isolation and noise reduction.

NO.	DESCRIPTION	PVC Insulated PVC Sheathed
1	Conductor	Circular stranded plain annealed copper wire according to IEC60228
2	Identification of cores: Single pair – Black and White Multi pairs and above: Number 1, 2... and the number shall be yellow or black printed on White cores.	Polyvinyl chloride compound (PVC) type T11 according to BS EN50288-1
3	Individual Screen	Aluminium polyester tape with metallic side downward in contact with a 0.5mm ² tinned copper drain wire (OPTIONAL)
4	Laying Up	Pairs stranded together. Binder tape and non-hygroscopic filler may be applied where necessary
5	Overall Screen	Aluminium polyester tape with metallic side downward in contact with a 0.5mm ² tinned copper drain wire (OPTIONAL)
6	Outer sheath shall be black	PVC type TM5 1 according to BS EN50288-1

TECHNICAL DATA

1	Voltage	300/500V
2	Maximum Conductor Temperature	70°C
3	Reference	BS EN50288-7
4	Testing Voltage	1000V
5	Minimum Bending Radius	8 X Bending Radius